

[Hunter Golf](#) / [Agronomics](#) / [Rotors](#) / [Nozzles](#)
[Controllers](#) / [Command Center](#) / [Pipe](#) / [Drainage](#)
[Lighting](#) / [Tools](#) / [Pond Solutions](#)
[Snow & Ice Removal](#) / [Pump Stations](#)
[Flags](#) / [Golf Accessories](#)

Hunter Golf / Agronomics / Rotors / Nozzles

Controllers / Command Center / Pipe / Drainage

Lighting / Tools / Pond Solutions

Snow & Ice Removal / Pump Stations

Flags / Golf Accessories



WOLF CREEK CO.
DISTRIBUTION

937-529-2155 | www.WolfCreekCompany.com

GOLF PRODUCTS CATALOG

TABLE OF CONTENTS

GOLF SERVICES	4	FITTINGS	16
ABOUT HUNTER GOLF	5	GOLF ACCESSORIES.....	20
ROTORS.....	6	PIPE REPAIR	22
NOZZLES	8	GOLF TOOLS	23
PILOT NETWORK	10	DRAINAGE	26
INTEGRATED HUB	12	OUTDOOR LIGHTING.....	27
FIELD CONTROLLER	13	POND SOLUTIONS	29
PUMP STATIONS	14	SNOW AND ICE REMOVAL	31
SWING JOINTS	15		



WHY PROFESSIONALS CHOOSE WOLF CREEK FIRST... AND YOU SHOULD TOO.

Wolf Creek Company is a wholesale distributor of irrigation and landscaping products servicing Ohio, Pennsylvania, and Kentucky. We provide expertise and product lines for Golf Course and Large Irrigation Systems, pump stations, drainage, agronomics, lighting, and water features. We supply the highest quality professional products, including Hunter Irrigation, Watertronics, PPS Pumps, Munro Pumps, NDS Drainage, Kasco Fountains, FX Luminaire and WAC Landscape Lighting, as well as many other vendor lines.

Let us work together with you. We can plan for upgrades and fine-tuning your irrigation system, and create a plan that works for your course and your budget. You will find that our superior technical expertise and product support will improve your course and your business and create reliable and sustainable turf.


Contact us to get started: golf@wolfcreekcompany.com 1-833-922-GOLF



GOLF SERVICES

SOLUTIONS FOR YOUR GOLF COURSE

Wolf Creek Company has been a premier golf irrigation distributor for over three decades. We are more than just a supplier of your golf products. We are your golf partners.

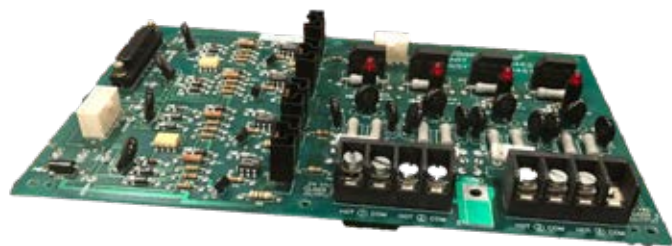

CENTRAL CONTROL TRAINING

We have extensive knowledge of irrigation control systems and can help train you on how to use these most efficiently on your golf course.

BOARD LEVEL REPAIRS

We can repair boards and components for your irrigation field satellites.

DELIVERY

We know how important it is to have your product when you need it, which is why we offer on-site delivery.



COMING SOON: ONLINE ORDERING

We are working on a new eCommerce solution for our customers. Stay tuned!



ABOUT HUNTER GOLF

Wolf Creek is a proud distributor of Hunter Industries Golf products throughout Indiana and Western Kentucky. Founded in 1981, Hunter Industries is a family-owned, global manufacturer of best-in-class solutions for residential, commercial, municipal, agricultural, and golf course irrigation systems, as well as the outdoor lighting industry. Headed by CEO Greg Hunter, their Global Operations team provides leadership for the entire company.



Hunter has been on the leading edge of golf course irrigation for more than three decades. They build performance, reliability, and serviceability into every product. From their industry-best rotors to their robust Pilot® irrigation control system, they take pride in providing golf experts and professionals with the tools and support they need to conceptualize, create, and manage world-class golf courses.



From rotors and valves to weather sensors and smart controllers, Hunter's philosophy is to produce products that allow landscape professionals to create optimal functionality and ambiance while promoting sustainable resource use. They are committed to pushing the boundaries of technology and customer experience in every product and project they undertake.



The core mission of Hunter Industries will always remain the same: **to deliver value products and services backed by unwavering customer support, grow the company conscientiously, and remain true to the culture that makes employees proud to work at Hunter.**

Hunter®

TTS-800 SERIES ROTORS

ROTOR SOLUTIONS

Patented TTS technology allows for every serviceable element of the rotor to be accessed through the top. Mechanical and electrical, big and small, you can get to every component without disturbing the playing surface. That means there's no more digging, no more unsightly scars, and more importantly, one less item on a busy superintendent's schedule.



TTS-800

Radius: 49' to 97'
Flow: 14.2 to 58.5 GPM
Pressure: 50 to 100 PSI



TTS-885

Radius: 37' to 94'
Flow: 8.9 to 59.6 GPM
Pressure: 50 to 100 PSI







TTS-835

Radius: 18' to 50'
Flow: 1.9 to 12.8 GPM
Pressure: 40 to 65 PSI

ADVANCED FEATURES

- 1 Access Everything Through the Top
- 2 Largest Flange Compartment in the Industry
- 3 Easy Access and Servicing of Solenoid and Pressure Regulators
- 4 Single-Point Fast-Access to Flange Compartment
- 5 Large and Flexible Yardage Marker Capabilities
- 6 Unitized Inlet Valve Design Includes Serviceable Components
- 7 Exclusive Inlet Valve Includes Self-Cleaning Capabilities
- 8 Two-Stage Serviceable Filtration in Valve Circuitry
- 9 Heavy-Duty Flanged and Ribbed Body Design
- 10 Three Cable Entry Ports at Base of Flange Compartment
- 11 Low-Bounce Rubber Cover Kit
- 12 No-Bounce Turf Cup Kit



Additional products and options are available. Contact your local Wolf Creek Representative for more information.

G-800 & B SERIES ROTORS

ROTOR SOLUTIONS

G800 Series are reliable and efficient mid-range performers that provide unsurpassed distribution with a wide range of flow and radius capabilities. They are available in an array of TTS and VIH configurations. The B Series rotors are for the customer on a budget, and they provide all the standard features you want for mid-distance coverage.



G-880

Model: Full-Circle
Radius: 67' to 88'
Flow: 22.5 to 57.9 GPM
Pressure: 65 to 100 PSI



G-885

Model: Full-Circle / Part-Circle
Radius: 43' to 91'
Flow: 8.2 to 57.5 GPM
Pressure: 50 to 100 PSI



G-835

Model: Full-Circle / Part-Circle
Radius: 18' to 50'
Flow: 1.9 to 12.8 GPM
Pressure: 40 to 65 PSI



G-80B

Model: Full-Circle
Radius: 67' to 88'
Flow: 22.5 to 57.9 GPM
Pressure: 65 to 100 PSI



G-85B

Model: Full-Circle / Part-Circle
Radius: 43' to 91'
Flow: 8.2 to 57.5 GPM
Pressure: 65 to 100 PSI







































UNIFORMITY YOU CAN COUNT ON.

ROTOR NOZZLES

ROTOR SOLUTIONS

The nozzle performance data and nozzles below will apply to models TTS-880, TTS-884, G-880, G-884, G-80B, and G-84B.

NOZZLE PERFORMANCE DATA

Nozzle Set			Pressure PSI	Radius ft.	Flow GPM	Precip in/hr ■ ▲	
 Tan 803611	 15 White	 Gray 315317	50	49	14.2	0.57	0.66
			60	51	15.7	0.58	0.67
			65	52	16.4	0.58	0.67
			70	53	17.0	0.58	0.67
 Tan 803611	 18 Orange	 Gray 315317	50	56	17.2	0.53	0.61
			60	58	18.8	0.54	0.62
			65	59	19.7	0.54	0.63
			70	60	20.0	0.53	0.62
 Tan 803611	 20 Brown	 Gray 315317	50	57	18.4	0.55	0.63
			60	59	20.3	0.56	0.65
			65	61	21.4	0.55	0.64
			70	63	21.6	0.52	0.60
 Tan 803611	 23 Green	 Lt. Blue 315311	50	63	21.6	0.52	0.60
			60	65	23.0	0.52	0.61
			65	66	24.0	0.53	0.61
			70	67	24.9	0.53	0.62
 Tan 803611	 25 Blue	 Lt. Blue 315311	80	64	22.7	0.53	0.62
			65	71	28.6	0.55	0.63
			70	73	29.7	0.54	0.62
			80	74	31.7	0.56	0.64
 Tan 803611	 33 Gray	 Lt. Blue 315311	90	75	33.7	0.58	0.67
			100	77	35.8	0.58	0.67
			65	74	30.9	0.54	0.63
			70	75	32.0	0.55	0.63
 Tan 803611	 38 Red	 Lt. Blue 315311	80	77	34.2	0.56	0.64
			90	79	36.2	0.56	0.64
			100	81	38.2	0.56	0.65
			65	77	35.1	0.57	0.66
 Tan 803611	 43 Dk. Brown	 Lt. Blue 315311	70	79	36.6	0.56	0.65
			80	82	38.9	0.56	0.64
			90	84	41.3	0.56	0.65
			100	87	43.6	0.55	0.64
 Tan 803611	 48 Dk. Green	 Blue 315315	-	-	-	-	-
			70	83	41.3	0.58	0.67
			80	85	43.6	0.58	0.67
			90	87	46.3	0.59	0.68
 Dk. Brown 803610	 53 Dk. Blue	 Lt. Blue 315311	100	89	48.8	0.59	0.68
			-	-	-	-	-
			70	90	46.9	0.56	0.64
			80	92	48.9	0.56	0.64
 Dk. Brown 803610	 53 Dk. Blue	 Dk. Blue 833500	90	94	50.5	0.55	0.63
			100	96	53.5	0.56	0.65
			-	-	-	-	-
			70	91	49.8	0.58	0.67
 Dk. Brown 803610	 53 Dk. Blue	 Dk. Blue 833500	80	93	52.2	0.58	0.67
			90	95	55.5	0.59	0.68
			100	97	58.5	0.60	0.69

● = Nozzle plug P/N 315300 installed in the front side of the nozzle housing.

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

STANDARD NOZZLES











LOW-ANGLE NOZZLES**



**Low-angle nozzles reduce radius by 15%

The nozzle performance data and nozzles below will apply to models TTS-835 and G-835.

NOZZLE PERFORMANCE DATA

Nozzle	Pressure PSI	Radius ft.	Flow GPM	Precip in/hr ■ ▲	
 2 Yellow	40	18	1.9	0.56	0.65
	50	20	2.1	0.51	0.58
	60	22	2.4	0.48	0.55
	65	23	2.6	0.47	0.55
 3 Yellow	40	23	3.0	0.55	0.63
	50	25	3.2	0.49	0.57
	60	27	3.5	0.46	0.53
	65	28	3.6	0.44	0.51
 4 Yellow	40	25	3.9	0.60	0.69
	50	28	4.1	0.50	0.58
	60	30	4.4	0.47	0.54
	65	31	4.6	0.46	0.53
 5 Yellow	40	29	4.7	0.54	0.62
	50	32	5.0	0.47	0.54
	60	33	5.3	0.47	0.54
	65	35	5.4	0.42	0.49
 6 Yellow	40	32	6.0	0.56	0.65
	50	35	6.3	0.50	0.57
	60	37	6.6	0.46	0.54
	65	39	6.8	0.43	0.50
 8 Yellow	40	36	7.8	0.58	0.67
	50	39	8.0	0.51	0.58
	60	42	8.3	0.45	0.52
	65	43	8.5	0.44	0.51
 10 Yellow	40	39	9.7	0.61	0.71
	50	43	10.1	0.53	0.61
	60	45	10.3	0.49	0.57
	65	47	10.5	0.46	0.53
 12 Yellow	40	44	12.0	0.60	0.69
	50	47	12.2	0.53	0.61
	60	48	12.5	0.52	0.60
	65	50	12.8	0.49	0.57

* Complies to ASAE standard. All precipitation rates calculated for 360° operation. All triangular rates are equilateral.

STANDARD NOZZLES



Additional products and options are available. Contact your local Wolf Creek Representative for more information.

ROTOR NOZZLES

ROTOR SOLUTIONS

The nozzle performance data and nozzles below will apply to models TTS-885, G-885, and the G-85B.

NOZZLE PERFORMANCE DATA

Nozzle Set			Pressure PSI	Radius ft.	Flow GPM	Precip in/hr	
						■	▲
Orange	10	Dk. Green	50	37	8.9	0.63	0.72
			60	39	9.8	0.62	0.72
			65	41	10.2	0.58	0.67
803603			-	-	-	-	-
		Lt. Green	-	-	-	-	-
Orange	13	White	50	47	11.4	0.50	0.57
			60	48	12.3	0.51	0.59
			65	49	12.9	0.52	0.60
803603			-	-	-	-	-
		Lt. Blue	-	-	-	-	-
Orange	15	White	50	52	12.9	0.46	0.53
			60	52	14.5	0.52	0.60
			65	53	14.9	0.51	0.59
			70	53	15.5	0.53	0.61
803603			80	54	16.5	0.54	0.63
		White	-	-	-	-	-
Orange	18	Lt. Green	50	57	16.6	0.49	0.57
			60	58	17.8	0.51	0.59
			65	59	18.6	0.51	0.59
			70	60	19.4	0.52	0.60
803603			80	61	20.5	0.53	0.61
		Orange	-	-	-	-	-
Orange	20	Lt. Green	50	59	17.9	0.49	0.57
			60	61	19.5	0.50	0.58
			65	62	19.8	0.50	0.57
			70	63	20.6	0.50	0.58
803603			80	64	22.1	0.52	0.60
		Tan	-	-	-	-	-
Orange	23	Lt. Green	50	65	20.2	0.46	0.53
			60	66	22.1	0.49	0.56
			65	67	23.9	0.51	0.59
			70	67	24.2	0.52	0.60
803603			80	69	25.9	0.52	0.60
		Green	-	-	-	-	-
Red	25	Green	65	71	28.3	0.54	0.62
			70	72	29.3	0.54	0.63
			80	73	31.5	0.57	0.66
			90	74	33.4	0.59	0.68
			100	75	35.4	0.61	0.70
803602			-	-	-	-	-
		Blue	-	-	-	-	-
Red	33	Green	65	72	30.6	0.57	0.66
			70	73	31.6	0.57	0.66
			80	75	33.9	0.58	0.67
			90	77	35.8	0.58	0.67
			100	79	37.9	0.58	0.67
803602			-	-	-	-	-
		Gray	-	-	-	-	-
Red	38	Green	65	76	34.9	0.58	0.67
			70	78	36.2	0.57	0.66
			80	80	39.1	0.59	0.68
			90	82	41.2	0.59	0.68
			100	84	43.5	0.59	0.69
803602			-	-	-	-	-
		Red	-	-	-	-	-
Red	43	Green	70	81	41.2	0.60	0.70
			80	83	43.5	0.61	0.70
			90	86	46.2	0.60	0.69
			100	89	48.7	0.59	0.68
803602			-	-	-	-	-
		Dk. Brown	-	-	-	-	-
Dk. Red	48	Dk. Green	70	83	46.3	0.65	0.75
			80	85	48.4	0.64	0.74
			90	89	51.7	0.63	0.73
			100	91	54.5	0.63	0.73
803601			-	-	-	-	-
		Dk. Green	-	-	-	-	-
Dk. Red	53	Dk. Green	70	87	50.7	0.64	0.74
			80	-	-	0.65	0.75

STANDARD NOZZLES

LOW-ANGLE NOZZLES**



**Low-angle nozzles reduce radius by 15%


The G-80 and the G-85 gear drives share the same primary nozzle sets. Each gear drive has dedicated short and mid-range nozzles that when combined with the primary nozzles create the uniformity you can count on. Choose from a wide assortment of efficient wind-fighting 22.5° standard trajectory nozzles, or 15° low-angle trajectory nozzles.

Either way, there is a perfect match for your unique course conditions and problem-solving needs. Regardless of the version you choose, changing nozzles is fast and easy with Hunter's exclusive QuickChange technology.



PILOT® NETWORK

PILOT COMMAND CENTER SOFTWARE

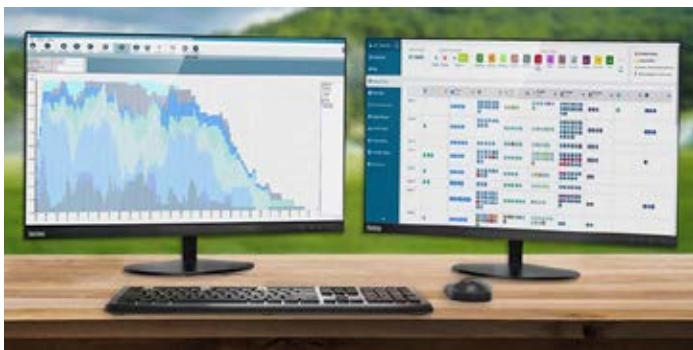

Pilot Command Center software (CCS) is easy to use and has all the features you need to reliably and automatically water your course. Run times can be adjusted manually or determined automatically using ET. You create watering plans directly in the Command Center — a powerful irrigation planning tool that shows you every sprinkler on the course organized according to your management style.

FEATURES

COMMAND CENTER: The Command Center organizes all the information you need for daily operation in one place.

WATERING STRATEGY: Make today's changes and then pick a time to start watering. Pilot takes care of the rest!

WATER AND WAIT: Is it difficult to water your course without wet and dry spots because your older system has three heads per station? Water and Wait can help. This feature breaks long runtimes into several short watering periods separated by a wait time. The wait time allows water to percolate into the root zone before more is applied.

HYDRAULIC MODEL: Extend the life of your underground pipe network. The hydraulic model ensures water passing from your pump station to each of your sprinklers travels at safe speeds to prevent sudden spikes in pressure.

WATERING WINDOW: Save money on electricity by optimizing your watering window. Pilot's hydraulic model produces water window efficiencies of 90% or better.

ET-BASED SCHEDULING: Add a weather station and Pilot can determine the amount of water required according to local weather conditions.

SYSTEM LIFE: With Pilot CCS, critical irrigation is not dependent upon the availability of a computer or communications link that is subject to a single point of failure. Pilot CCS turns your watering plan into highly efficient instructions then gives them to the Pilot Network, where they are stored in the non-volatile memory of your field equipment. Each controller and hub follows the instructions daily until you send new instructions. If there is a problem with your computer and you are unable to send new instructions, your hubs or controllers will continue watering using the last instructions they received.

REPORTS: Stored reports can also be saved as spreadsheets.

OPERATING SYSTEM: Pilot CCS comes pre-loaded on a compact, display-mounted computer running the latest Windows® operating system. Currently, systems are shipped with 64-bit Microsoft® Windows 10 Pro.

(Microsoft and Windows are trademarks or registered trademarks of Microsoft Corp. in the U.S. and other countries.)

CONTROLLER PROGRAMS: Sometimes you need precise control over exactly which station runs and when, such as when you are germinating seed or winterizing the system. Pilot field controllers and hubs have the best standalone controller programming features in the industry. If you link your field equipment together as part of a Pilot Network, you can view and edit the controller-based schedules from the comfort of your own office.

With newly enhanced
Pilot Command Center software,
Superintendents can create
hydraulically safe and efficient
daily golf course watering plans
faster than ever before.



PILOT® NETWORK


ADVANCED PRODUCT FEATURES



1 **MAPPING:** Improve your understanding of your course by adding an interactive map.

2 **WATERING PLAN:** The watering plan is part of the Command Center. It displays every sprinkler on your course, organized according to your management preference.

3 **HYDRAULIC AND ELECTRICAL MANAGEMENT:** Pilot uses electrical data from your controllers and hydraulic data about pump stations, underground piping, and sprinklers to efficiently balance sprinkler demand while maintaining flow at safe velocities.

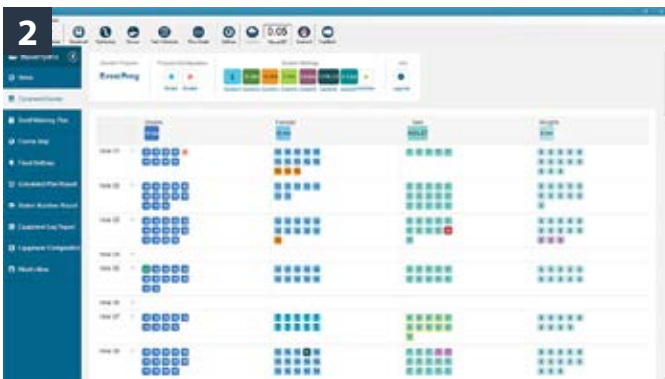

SPECIFICATIONS

First-year Pilot CCS packages include a complimentary one-year membership in the Hunter Support Network (HSN) and an uninterruptible power supply

Operating system: 64-bit Windows®


Maximum controllers or hubs: about 1,000

Maximum two-way module stations: about 1 million

Sprinkler run time options: minutes, inches, millimeters, or ET

Hydraulic management: fully customizable down to individual stations

Mapping: interactive and based on scalable vector graphics (SVG)

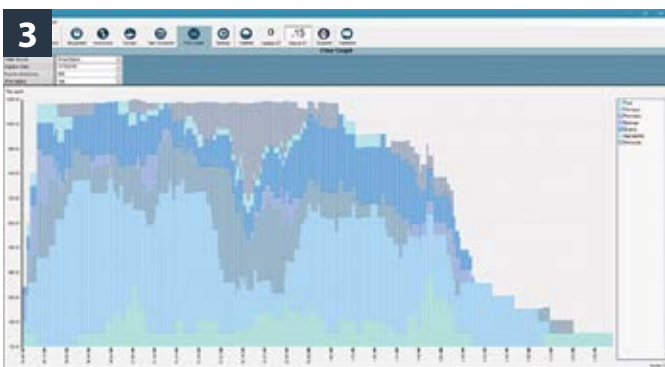

MODELS

DESCRIPTION

PILOTHSN	⋮	Pilot Command Center Software plus one-year Hunter Support Network (U.S. only)
PILOTCC	⋮	Pilot Command Center Software (international)

First-year Pilot CCS packages include a complimentary one-year membership in the Hunter Support Network and an uninterruptible power supply. ⋮

INTEGRATED HUB

PILOT INTEGRATED HUB SYSTEMS



Integrated hub systems are one of the fastest-growing forms of technology in irrigation control. A key advantage over field controller systems is that integrated hub systems use significantly less wire. This means lower costs, faster installation, and easier system diagnosis and repair if needed. Systems can be easily expanded — with minimal digging and disruption of landscaping - by adding more two-way modules (TWMs) instead of running additional wires.

Pilot embraces this cost-efficient approach. Pilot two-way modules are available with 1-, 2-, 4-, and 6-station outputs, making it possible to run each head on an entire green with a single device. In all, TWMs let you operate about 1,000 stations up to 1.5 miles from a single hub.

Pilot two-way modules include built-in surge suppression, color-coded wire connections, true independent station control, programmable station addresses, and two-way feedback to the hub with confirmation and status indication. Pilot-SG surge suppressors are required when the system is designed and installed with golf rotors containing integrated TWMs.

FEATURES

WATER-RESISTANT KEYPAD: The large, illuminated keypad with a backlit display includes convenient function buttons for the most commonly used features. Built in system diagnostics make troubleshooting your system a breeze.

DIAGNOSTIC LED INDICATORS: In addition to control panel indications, diagnostic lights on output modules visually tell you if stations are running, station outputs have overloaded and much, much more.

250-STATION OUTPUT MODULES: Enables your integrated hub system to grow with your course. Start with 250 - grow to 999.

PILOT INTEGRATED HUB SYSTEMS PILOT-DH

MODELS

Pilot-DH250 = 250 Station

Pilot-DH500 = 500-station

Pilot-DH750 = 750-station

Pilot-DH999 = 999-station

STANDARD FEATURES

Plastic pedestal (gray)

COMMUNICATION OPTIONS

HWR = Wired communications

UHF = UHF radio (license required)

LF = 915 MHz spread-spectrum radio
(no license needed)

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

FIELD CONTROLLER

PILOT FIELD CONTROLLER SYSTEM



The Pilot field controller manages up to 80 stations in 10-station increments. The full-featured controller has everything you need in a stand-alone field controller.

For a fully automated, flow-optimized system network all your controllers together with Pilot Command Center software. Communication options include wired, UHF radio and license-free radio. Power options include both 120 VAC and 230 VAC. Advanced troubleshooting features like a UHF radio signal strength meter and extensive system and error logging are complimented by Hunter's Safety-Toggle™ station switches.

To make things even easier, the only service tool required is a phillips screwdriver – and you don't even have to bring it with you because we include one with every controller.

PILOT FIELD CONTROLLER SYSTEM PILOT-FI

MODELS

Pilot-FI = Field Interface

STANDARD FEATURES

Plastic wall-mounted cabinet

COMMUNICATION OPTIONS

HWR = Wired Communications

UHF = UHF radio (license required)

LF = 915 M.Hz spread-spectrum radio (no license needed)

PILOT FIELD CONTROLLER SYSTEM PILOT-FC

MODELS

Pilot-FC20 = 20 Station

Pilot-FC30 = 30 Station

Pilot-FC40 = 40 Station

Pilot-FC50 = 50 Station

Pilot-FC60 = 60 Station

Pilot-FC70 = 70 Station

Pilot-FC80 = 80 Station

STANDARD FEATURES

Plastic pedestal (grey)

120/230 VAS 60/50 Hz dual-voltage transformer

COMMUNICATION OPTIONS

S = Standalone field controller with no central communications

HWR = Wired communications

UHF = UHF radio (license required)

LF = 915 MHz spread-spectrum radio (no license needed)

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

PUMP STATIONS

SERVICE AND NEW SYSTEMS.



Precision Pumping Services is committed to excellence. Their rugged golf & irrigation pump systems offer the high efficient performance and reliability golf course superintendents demand without the high cost, timeline issues and quality concerns of traditional built-in systems. Throughout the design process, we work closely with you to ensure the finished project matches the exact specifications AND is delivered on time.



HIGH PERFORMANCE OPTIONS



VERTICAL TURBINE PUMP STATION

Design Flow Rate: 3000 GPM
Station Pressure: 100 PSI
Discharge Pressure: 100 PSI
Voltage: 480V **Hertz:** 60Hz
Phase: 3P

Pumps HP: Performance:
 3 75 1060 GPM @ 250 TDH
 1 15 180 GPM @ 250 TDH



UV TREATMENT - WATER RE-CAPTURE

Design Flow Rate: 75 GPM
Station Pressure: 75 PSI
Discharge Pressure: 75 PSI
Voltage: 480V **Hertz:** 60Hz
Phase: 3P **HP:** 7.5
Performance: 75GPM @ 85'



VARIABLE SPEED END-SUCTION CENTRIFUGAL

Design Flow Rate: 20-95 GPM
Boost Pressure: 70 PSI
Horsepower: 2, 3, 5 HP
Electrical Input: Single Phase / 3 Phase / 60 Hz @ 208, 240, or 480 Volts



INTEGRATED AUTOMATIC FILTRATION SYSTEM

Design Flow Rate: 900 GPM
Discharge Pressure: 70 PSI
Voltage: 480V
Hertz: 60Hz **Phase:** 3P

Pumps HP: Performance:
 2 25 450 GPM @ 165'TDH
 1 7.5 100 GPM @ 165'TDH



SUBMERSIBLE PUMP SKID

Design Flow Rate: 200 GPM
Station Pressure: 80 PSI
Discharge Pressure: 80 PSI
Voltage: 480V
Hertz: 60Hz **Phase:** 3P
HP: 20
Performance: 200GPM @ 267'



SUBMERSIBLE TURBINE

Design Flow Rate: 450 GPM
Pressure: 80 PSI **Voltage:** 480V
Hertz: 60Hz **Phase:** 3P

Pumps HP: Performance:
 2 15 450 GPM @ 185'TDH
 1 3 Pressure Maint.

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

SWING JOINTS

GOLF HSJ SWING JOINTS



Heavy-duty prefabricated PVC swing joints with O-ring seals

Available in all popular inlet and outlet configurations

Choose from 8", 12" or 18" lay arm lengths

Single Top-Out or Triple Top-Out designs

Unique SnapLok™ outlet with brass threads offers excellent support and durability for quick coupler installations

Match HSJ swing joint and Hunter golf rotor purchases from authorized Hunter Golf Distributor to qualify for an upgraded 5-year component exchange golf rotor warranty

SWING JOINT SPECIFICATION BUILDER

MODELS

HSJ-0 = ¾" Commercial Swing Joint

HSJ-1 = 1" Commercial Swing Joint

HSJ-2 = 1¼" Commercial Swing Joint

HSJ-3 = 1½" Commercial Swing Joint

INLET TYPE

2 = Spigot - Short (inlet 4 recommended)

3 = Male - NPT

4 = Male - Acme*

7 = Spigot - 4" Long**

M = Main Acme H-Connection***

P = Main Acme V Connection****

*Not available in HSJ-0 or HSJ-3. Use "M" inlet for HSJ-3.

**Not available in HSJ-0.

*** Horizontal connection reduces from 1½" Acme to swing joint size.

**** Vertical connection reduces from 1½" Acme to swing joint size.

OUTLET TYPE

2 = Male - NPT

3 = Enlarging - to 1½" Male NPT*

6 = Enlarging - to 1½" (40mm) Male BSP*

8 = Enlarging - to 1½" Male Acme*

0 = Main Acme

A = Enlarging / Reducing - to 1¼" Male Acme**

S = Male - Brass NPT SnapLok™***

*Not available in HSJ-0 or HSJ-3.

**Not available in HSJ-0 and HSJ-2.

*** HSJ-1 model only - for quick coupler.

OUTLET STYLE

2 = Single Top-Out

4 = Triple Top-Out*

*Not available in S outlet type.

LAY LENGTH

2 = 8" Lay Arm *

12 = 12" Lay Arm

18 = 18" Lay Arm

*HSJ-0 only.

ACME ADAPTER FITTINGS



1¼" MODELS

109325 1¼" male Acme x 1" female NPT

105329 1¼" male Acme x 1" female BSP

474800 1¼" male Acme x 1¼" female NPT

474900 1¼" male Acme x 1¼" female BSP

104153 1¼" male Acme x 1½" female NPT

107262 1¼" male Acme x 1½" female BSP



1½" MODELS

475400 1½" male Acme x 1" female NPT

475500 1½" male Acme x 1" female BSP

475200 1½" male Acme x 1¼" female NPT

475300 1½" male Acme x 1¼" female BSP

475000 1½" male Acme x 1½" female NPT

475100 1½" male Acme x 1½" female BSP



ACME X ACME MODELS

225300 1½" male Acme x 1" Acme female

225400 1½" male Acme x 1¼" Acme female

225500 1¼" male Acme x 1" Acme female



B2B TEE ASSEMBLY

1½" Acme threaded tee and 1½" adapter for connecting two swing joints to a single mainline connection in back-to-back installations around greens.

HSJ-305-015-3 = NPT inlet

HSJ-305-015-6 = BSP inlet

HSJ-305-015-M = Acme inlet (shown)

PVC SCHEDULE 40 FITTINGS

FITTING SIZE (XXX)

1"	3"
1 1/2"	4"
2"	6"
2 1/2"	8"



401-xxx
Tees – S x S x S



406-xxx
Elbow – 90 Deg, S x S



407-xxx
Elbow – 90 Deg, S x FIPT



417-xxx
Elbow – 45 Deg, S x S



429-xxx Coupling – S x S



447-xxx
Cap – S



436-xxx
Male Adapter – MIPT x S



435-xxx
Female Adapter – S x FIPT



H195-xxx
PVC Flange Gaskets

ELBOW – 90 DEG, REDUCING

407-211

1 1/2" S x 1" FIPT

407-212

1 1/2" S x 1 1/4" FIPT

417-249

2" S x 1" FIPT

407-251

2" S x 1 1/2" FIPT

406-211

1 1/2" S x 1" S

406-251

2" S x 1 1/2" S

307-251

2" FIPT x 1 1/2" ACME



TEE – REDUCING, S X S X S

401-249

2" x 2" x 2"

401-250

2" x 2" x 1 1/4"

401-251

2" x 2" x 1 1/2"

401-289

2 1/2" x 2 1/2" x 1"

401-291

2 1/2" x 2 1/2" x 1 1/2"

401-292

2 1/2" x 2 1/2" x 2"

401-335

3" x 3" x 1"

401-337

3" x 3" x 1 1/2"

401-338

3" x 3" x 2"

401-417

4" x 4" x 1"

401-419

4" x 4" x 1 1/2"

401-420

4" x 4" x 2"

401-422

4" x 4" x 3"



TEE – REDUCING, S X S X FIPT

402-211

1 1/2" x 1 1/2" x 1"

402-2112

1 1/2" x 1 1/2" x 1 1/4"

402-249

2" x 2" x 1"

402-250

2" x 2" x 1 1/4"

402-251

2" x 2" x 1 1/2"

402-335

3" x 3" x 1"

402-337

3" x 3" x 1 1/2"

402-338

3" x 3" x 2"

402-417

4" x 4" x 1"

402-419

4" x 4" x 1 1/2"

402-420

4" x 4" x 2"

402-422

4" x 4" x 3"



TEE – REDUCING, S X S X ACME

302-251

2" x 2" x 1 1/2"

302-291

2 1/2" x 2 1/2" x 1 1/2"

302-337

3" x 3" x 1 1/2"



CAPS – ACME

G548-010

ACME Test Cap- 1"

G548-012

ACME Test Cap- 1 1/4"

G548-015

ACME Test Cap- 1 1/2"



COUPLING – REDUCING, S X S

429-212

1 1/2" x 1 1/4"

429-251

2" x 1 1/2"

429-338


3" x 2"

429-422

4" x 3"

429-532

6" x 4"



REDUCER BUSHING – S X S

437-211

1 1/2" x 1"

437-212

1 1/2" x 1 1/4"

437-249

2" x 1"

437-250

2" x 1 1/4"

437-251

2" x 1 1/2"

437-335

3" x 1"

437-336

3" x 1 1/4"

437-337

3" x 1 1/2"

437-338

3" x 2"

437-420

4" x 2"

437-422

4" x 3"

437-528


6" x 2"

437-530

6" x 3"

437-532

6" x 4"



REDUCER BUSHING – S X FIPT

438-211

1 1/2" x 1"

438-212

1 1/2" x 1 1/4"

438-249

2" x 1"

438-250

2" x 1 1/4"

438-251

2" x 1 1/2"

438-335

3" x 1"

438-336

3" x 1 1/4"

438-337

3" x 1 1/2"

438-338

3" x 2"

438-420

4" x 2"

4" x 3"



REDUCER BUSHING – MIPT X FIPT

439-073

1/2" x 3/8"

439-099

3/4" x 3/8"

439-101

3/4" x 1/2"

439-130

1" x 1/2"

439-131

1" x 3/4"

439-166

1 1/4" x 1/2"

439-167

1 1/4" x 3/4"

439-168

1 1/4" x 1"

439-209

1 1/2" x 1"

439-211

1 1/2" x 1 1/4"

2" x 1/2"



FITTINGS

PVC GASKETED AND DUCTILE IRON FITTINGS

PVC GASKETED FITTINGS

FITTING SIZE (XXX)

010	1"	030	3"
015	1 ½"	040	4"
020	2"	060	6"
025	2 ½"	080	8"

H108-xxx

Coupling – G x G



H109-xxx

Repair Coupling – No int stops, G x G



H118-xxx

Elbow – 90 Deg, G x G



H122-xxx

Elbow – 45 Deg, G x G



H130-xxx

Adapter – Spigot x G



TEE – G X G X G

H112-220

2" x 2" x 2"



H112-320

3" x 3" x 2"

H112-330

3" x 3" x 3"

H112-420

4" x 4" x 2"

H112-430

4" x 4" x 3"

H112-620

6" x 6" x 2"

H112-630

6" x 6" x 3"

H112-640

6" x 6" x 4"

H112-660

6" x 6" x 6"

H112-880

8" x 8" x 8"

SERVICE TEE G X G X ACME

H153-204

2" x 2" x 1"

H153-205

2" x 2" x 1 ¼"

H153-206

2" x 2" x 1 ½"

H153-304

3" x 3" x 1"

H153-305

3" x 3" x 1 ¼"

H153-306

3" x 3" x 1 ½"

DUCTILE IRON FITTINGS

FITTING SIZE (XXX)

801	2"	806	6"
802	2 ½"	808	8"
803	3"	810	10"
804	4"		


xxx40

Repair Coupling
No internal stops, G x G



xxx20

Elbow – 90 Deg, G x G



xxx22

Elbow – 45 Deg, G x G



TEE – G X G X G

8010101

2" x 2" x 2"

8030303

3" x 3" x 3"



8040404

4" x 4" x 4"

8060606

6" x 6" x 6"

8080808

8" x 8" x 8"

8101010

10" x 10" x 10"

8121212

12" x 12" x 12"

SERVICE TEE G X G X FIPT

801502

2" x 2" x 1"

8015025

2" x 2" x 1 ¼"

801503

2" x 2" x 1 ½"

803502

3" x 3" x 1"

8035025

3" x 3" x 1 ¼"

803503

3" x 3" x 1 ½"

803504

3" x 3" x 2"

804502

4" x 4" x 1"

8045025

4" x 4" x 1 ¼"

804503

4" x 4" x 1 ½"

806502

6" x 6" x 1"

8065025

6" x 6" x 1 ¼"

806503

6" x 6" x 1 ½"

806504

6" x 6" x 2"



SERVICE TEE – G X G X ACME

8015302

2" x 2" x 1"

80153025

2" x 2" x 1 ¼"

8015303

2" x 2" x 1 ½"

8035302

3" x 3" x 1"

80353025

3" x 3" x 1 ¼"

8035303

3" x 3" x 1 ½"

8045302

4" x 4" x 1"

80453025

4" x 4" x 1 ¼"

8045303

4" x 4" x 1 ½"

8065302

6" x 6" x 1"

80653025

6" x 6" x 1 ¼"

8065303

6" x 6" x 1 ½"

8085302

8" x 8" x 1"

80853025

8" x 8" x 1 ¼"

8085303

8" x 8" x 1 ½"

SWIVEL TEES – G X G SWIVEL

8015405

2" x 2" x Swivel

8035405

3" x 3" x Swivel

8045405

4" x 4" x Swivel

8065405

6" x 6" Swivel

8085405

8" x 8" x Swivel

8105405

10" x 10" x Swivel



SADDLES – FIPT

803804

3" x 2"

804804

4" x 2"

806804

6" x 2"

808804

8" x 2"

810804

10" x 2"



FITTINGS

REDUCER BUSHINGS

80230

2 1/2" x 2"

80332

3" x 2"

80434

4" x 2"

80430

4" x 3"

80638

6" x 2"

80634

6" x 3"

80632

6" x 4"

80836

8" x 3"

80834

8" x 4"

80832

8" x 6"

81036

10" x 3"

81034

10" x 4"

81032

10" x 6"

81030

10" x 8"

81236

12" x 4"

81234

12" x 6"

81232

12" x 8"

81230

12" x 10"



SWIVEL ISOLATION VALVES

8411062PN

2" x 6" Sqr Nut

8411122PN

2" x 12" Sqr Nut

8413062PN

3" x 6" Sqr Nut

8414062PN

4" x 6" Sqr Nut



DUCTILE GASKETS

85103 3"

85504 4"

85506 6"

85508 8"

85510 10"



HARCO JOINT RESTRAINTS

PIPE TO FITTING – BOLT ON

820310 3"

820420 4"

820620 6"

820820 8"



PIP TO FITTING – KNUCKLE

60-100-02 2"

60-100-03 3"

60-100-04 4"



PIPE TO FITTING – CLAMSHELL

820411 4"

820611 6"

820811 8"

821011 10"



PIPE TO PIPE

820115 2"

820315 3"

820415 4"

820615 6"

820815 8"

821015 10"




VALVE TO PIPE – STYLE A

820325 3"

820425 4"

820625 6"

820825 10"




VALVE TO PIPE – STYLE B

820326 3"

820426 4"

820626 6"

820826 8"



FITTING TO VALVE – BOLT ON

820320 3"

820420 4"

820620 6"

820820 8"



REPAIR COUPLERS

FSF100 1"

FSF125 1 1/4"

FSF150 1 1/2"

FSF200 2"

FSF250 2 1/2"

FSF300 3"

FSF400 4"



110-20 2"

110-30 3"

110-40 4"

110-60 6"



PVC PIPE

20' lengths

Pricing fluctuates with market

Priced per foot

CLASS 200 SOLVENT WELD PVC

P200-07 3/4"

P200-10 1"

P200-12 1 1/4"

P200-15 1 1/2"

P200-20 2"

P200-25 2 1/2"

P200-30 3"

P200-40 4"

P200-60 6"

P200-80 8"



CLASS 200 GASKETED PVC

P200-RT150 1 1/2"

P200-RT200 2"

P200-RT250 2 1/2"

P200-RT300 3"

P200-RT400 4"

P200-RT600 6"

P200-RT800 8"

P200-RT120 12"



WIRE

WIRE, WIRE CONNECTORS & WIRE STRIPPERS

WIRE

SINGLE STRAND CONTROL WIRE

Replace "color" with RED, WHITE, BLACK, or YELLOW.
Rated for direct burial.



10UF-color-500 UF 500' spool 10ga

10UF-color-2500 UF 2,500' spool 10ga

12PE-color-500 PE 500' spool 12ga

12PE-color-2500 PE 2,500' spool 12ga

14PE-color-500 PE 500' spool 14ga

14PE-color-2500 PE 2,500' spool 14ga

POWER WIRE

White and Black insulated conductor with bare copper ground
Rated for direct burial.



6/2UFB-500 500' spool 6ga

6/2UFB-1000 1,000' spool 6ga

8/2UFB-500 500' spool 8ga

8/2UFB-1000 1,000' spool 8ga

10/2UFB-500 500' spool 10ga

10/2UFB-1000 1,000' spool 10ga

12/2UFB-500 500' spool 12ga

12/2UFB-1000 1,000' spool 12ga

CENTRAL CONTROL 2- WIRE

Replace "color" with RED, BLUE, GREEN, ORANGE, or YELLOW.
Rated for direct burial.



12/2MAXI-color-500 500' 12ga

12/2MAXI-color-1000 1,000' 12ga

12/2MAXI-color-2500 2,500' 12ga


14/2MAXI-color-500 500' 14ga

14/2MAXI-color-1000 1,000' 14ga

14/2MAXI-color-2500 2,500' 14ga

WIRE CONNECTORS

Replaces all older models.
Not recommended for submergence.
Sold per piece.




3MDBRY-B Wire Connector

WIRE DIAGNOSTICS

ARMADA PRO 95

Perfect for irrigation diagnostics, including decoder systems.



PRO95 Multi-Meter

ARMADA PRO 900

Tracks wire and finds solenoids.
Ease of use, accuracy and reliance.



PRO900 Wire Tracker

ARMADA GFL3000

Finds ground faults



GFL300 Ground Fault Locator

WIRE CONNECTORS

WIRE STRIPPERS



WIRESR Wire Strippers

WIRE STRIPPERS



46200 2-Wire Jacket Stripper

ELECTRICAL TAPE



ELTP Electrical Tape

GROUNDING


GROUND RODS 5/8"

GRNDROD8 8"

GRNDROD10 10"

ROD CLAMPS

GRC5/8 5/8"



GROUND PLATES

CGP4x36 4" x 36"


CGP4x96 4" x 96"



GROUND WIRE

06BCOP

6ga Bare Copper Wire – 10'



MAXI SURGE PIPE

MSP-1

MPG-1



GOLF ACCESSORIES

UNDERHILL AND BAYCO PRODUCTS



SUPERKEY XL™

- Multi-Purpose tool for Toro, Rain Bird Sprinklers

A-SKTRB



ALUMINUM CLUB WASHER

- 690G** Club Washer (green)
- 690BK** Club Washer (black)
- 690R** Club Washer (red)
- 690CV** Club Washer (copper vein)



DETERGENT

- Leaves balls clean and no residue

718 Heavy Duty Detergent

718T Soap Tablets



BALL WASHER TOWELS

- Very absorbent and fast drying

731G Cotton Tri-Fold Green (12 per pkg)

718BK Cotton Tri-Fold Black (12 per pkg)



EASYREACH™ KEY

A-ERT Key for Toro and John Deere/ Signature golf sprinklers

A-ERR Key for Rain Bird golf sprinklers



TURBOTRIM™ TOOL

- Only trimmer with a forward and reverse drive ratchet mechanism

TTRT-100 without cutting blade



TURBOTRIM™ CUTTING BLADE

TTRC-007 7" cutting blade

TTRC-008 8" cutting blade

TTRC-011 11" cutting blade



PRO HOLE CUP

253AL Aluminum Pro-Hole Cup

253PL Plastic Pro-Hole Cup



PEST STRIPS

- Keeps bugs and pests out of irrigation controllers

AMVNUVANX16



YARDAGE MARKERS


- Mark your rotors with custom sprinkler caps

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

GOLF ACCESSORIES

BAYCO PRODUCTS

1/2" REGULATION POLES

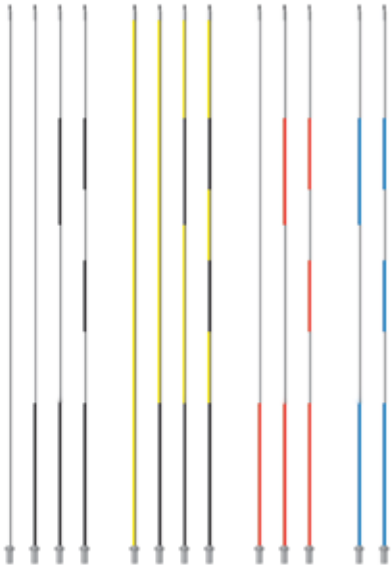

Bayco tournament flagsticks are manufactured to the highest quality and appearance for excellent corrosion resistance and weather-ability. Flagsticks come complete with aluminum bottom ferrule, top ferrule, and acorn nut. Will suit swivel or tube type flags. Choose from smooth, slotted or zinc ferrule.

# OF STRIPES	COLOR COMBINATION	5 FEET	7 FEET	7.5 FEET	8 FEET
0	WHITE	300W-5	300W-7	300W-75	300W-8
1	BLACK/WHITE	-	300BW-71	300BW-751	300BW-81
2	BLACK/WHITE	-	300BW-72	300BW-752	300BW-82
3	BLACK/WHITE	300Y-5	300BW-73	300BW-753	300BW-83
0	YELLOW	-	300Y-7	300Y-7.5	300Y-8
1	BLACK/YELLOW	-	300YB-71	300YB-751	300YB-81
2	BLACK/YELLOW	-	300YB-72	300YB-752	300YB-82
3	BLACK/YELLOW	-	300YB-73	300YB-753	300YB-83
1	RED/WHITE	-	300RW-71	-	-
2	RED/WHITE	-	300RW-72	300RW-752	-
3	RED/WHITE	-	300RW-73	300RW-753	300RW-83
2	BLUE/WHITE	-	300BLW-72	300BLW-752	-
3	BLUE/WHITE	-	-	300BLW-753	300BLW-83



CUSTOM FLAGS

- Unlimited Colors/Combinations
- Dye Sublimation uses solid dyes under heat and pressure to produce photo-lab quality images on fabric. Color is absorbed directly into the material, making it more durable and less vulnerable to fading.
- Choose from Poplin Flags, Dura Flags or Poly Silk Flutter Flags



THREE STRAND BRAIDED ROPE

- 287** Yellow
- 287W** White
- 287HG** Hunter Green
- 287BK** Black
- 287GR/WH** Green and White



1.5" RECYCLED PLASTIC ROPE STAKES

- 289G-15,18,24,30 or 36** Green Rope Stake
- 289R-15,18,24,30 or 36** Red Rope Stake
- 289W-15,18,24,30 or 36** White Rope Stake
- 289B-15,18,24,30 or 36** Blue Rope Stake
- 289Y-15,18,24,30 or 36** Yellow Rope Stake



BUNGEE ROPE

- 400BK** Black
- 400WH/BK** White with Black
- 400YE** Yellow
- 400HG/BK** Hunter Green with White



PIPE REPAIR

PRODUCTS FOR SYSTEM REPAIR



QUICK COUPLERS

Quick Couplers - 3/4" and 1", Keys, Swivels, Locking Cover Key

- 100% interchangeable with Hunter®, Rain Bird®, Toro®, and Buckner®
- Red brass and stainless steel construction
- TuffTop™ thermoplastic locking and non-locking covers
- Optional WingThing™ stabilization and acme key connection
- Stainless steel lug on 1" and 1-1/4" Keys
- Spring Loaded covers with stainless steel springs for positive closing and protection of valve's sealing components



SLIP FIX

SLP020 2" Slip Fix

SLP025 2.5" Slip Fix

SLP030 3" Slip Fix



SCH. 40 GLUE COUPLINGS

L482020 For 2" Pipe

L482025 For 2.5" Pipe

L482030 For 3" Pipe

L482040 For 4" Pipe

L482060 For 6" Pipe



PUSH-ON GATE VALVE

P619RW2 For 2" Pipe

P619RW212 For 2.5" Pipe

P619RW3 For 3" Pipe

P619RW4 For 4" Pipe

P619RW6 For 6" Pipe



GASKET JOINT REPAIR COUPLING

109020 2"

109025 2.5"

109030 3"

109040 4"

109060 6"



GLUE, GASKET LUBE

CSTRHMCLVQT12 PVC Cement Qt

CSTRHMPCPQT12 Clear Primer Qt

CSTRHPROQT Gasket Joint Lube Qt



SWING JOINTS

LSCG330212 1.5"

LSCG132212 1"

LSCG13S218 For 1" Brass Quick Couplers

*Other sizes and configurations are available.



VALVE BOXES

VB7RND 7" Round with lid

VB10RND 10" Round with lid

VBSTD Rectangle with lid

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

GOLF TOOLS

TOOLS FROM HUNTER



"T"-HANDLE TOOL

319100SP



ARC ADJUSTMENT / RISER HOLD-UP TOOL

- For G85B/G885

382300SP



VALVE INSERTION / REMOVAL TOOL

- For G-800 Series

604000SP



VALVE INSERTION / REMOVAL TOOL

- For G-900 Series/G90 Series

280500SP



VALVE AND SNAP RING INSERTION / REMOVAL PLIERS

- For G-900 Series/G90 Series

475600SP



SNAP RING REMOVAL TOOL

- All Golf Models

251000SP



HAND PUMP

217500SP



PILOT GAUGE

280100SP



HUNTER WRENCH

172000SP



NOZZLE REMOVAL / INSTALLATION TOOL

- For G85B, G885 Short- and Midrange Nozzles

803700SP



RISER PRESSURE GAUGE

- For G-80 (2019), G85 and G85 risers

991200SP

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

GOLF TOOLS

SEYMOUR MIDWEST AND BAYCO



1 KEY UTILITY TOOL 5'
Irrigation Sprinkler Key Utility Tool

2 SPRINKLER & VALVE KEY
48" steel handle, 2-prong design,
14" T handle with rubber grips
COR-UT61000

3 4" TRENCHING SHOVEL
48" wood handle, 13 gauge steel,
28° angle
COR-SS64304

4 ROUND POINT SHOVEL
15 Gauge # 2 / 48" wood handle
COR-SS26000

5 4" TRENCHING SHOVEL
48" hollow-core fiberglass handle,
13 gauge steel, 35° angle
COR-SS64124

6 BOW RAKE
Irrigation Bow Rake

7 POLY LEAF RAKE
Jobsite Poly Leaf Rake

8 SAND TRAP RAKE HEAD
• Disc Tooth Rake Head
161 16" Head & Hardware Only

9 SAND TRAP RAKE HEAD
• Octagon Rake Head
164BK 21" Head & Hardware Only
151BK 15" Head & Hardware Only

10 SAND TRAP RAKE HEAD
• Lightweight Rake Head
102 21" Head & Hardware Only
105 15" Head & Hardware Only




CORONA
SEASON AFTER SEASON

Additional products and options are available. Contact your local Wolf Creek Representative for more information.



GOLF TOOLS

BAYCO AND ARMADA

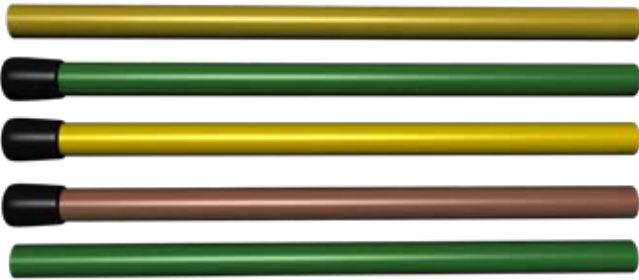

SAND TRAP RAKE HANDLES

- 105** Yellow Wood Handle Only
- 154** 51" Green Fiberglass Handle Only
- 152G-72** 72" Green Fiberglass Handle Only
- 152** 51" Yellow Fiberglass Handle Only
- 152Y-72** 72" Yellow Fiberglass Handle Only
- 154BR** 51" Brown Fiberglass Handle Only
- 154BR-72** 72" Brown Fiberglass Handle Only



BAYCO GUARD FOR RAKE HANDLES

Renew your rake handles the economical way with these rake handle guards.

- | | |
|-----------------------------------|-----------------------------------|
| 140GR125 Green Roll 125ft | 140GR250 Green Roll 250ft |
| 140YE125 Yellow Roll 125ft | 140YE250 Yellow Roll 250ft |
| 140BK125 Black Roll 125ft | 140BK250 Black Roll 250ft |



TURBO SHIFT

Dual Variable Flow: Delivers light fog and low volume jet stream before shifting to high volume jet stream and fan patterns.

- 12-43 GPM (45-463L/min)
- Nozzles and valves rated at 60 PSI working pressure

NG550DFH75 3/4" inlet

NG550DFH10 1" inlet



MAGNUM™ HOSE NOZZLES

- Multi-pattern sprays
- Ratchet mechanism prevents over-tightening damage
- Fire hose quality nozzle feels great in your hands
- Built for 1" and 3/4" flow rates

NG450



DRAINBLASTER™

High pressure drain cleaning nozzle

- Front jet cuts through blockage
- Rear jets propel nozzle upline
- Two stage flushing action
- Minimum water pressure: 70 PSI
- Grade 303 Stainless Steel

DN-75 3/4" FHT Inlet

DN-10 1" FHT Inlet



INDUSTRIAL GRADE WATER HOSE ASSEMBLY

ART0500XXYYGMF 1/2" M X F Water Hose Assembly

ARTW0625XXYYMF 5/8" M X F Water Hose Assembly

ARTW0750XXYYMF 3/4" M X F Water Hose Assembly

ART1000XXYYGMF 1" M X F Water Hose Assembly

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

DRAINAGE

DRAINAGE SOLUTIONS



12" CATCH BASINS

NDS-1200 12"x12" Catch Basin, 2 openings

NDS-1203 12" x 12" Catch Basin, 3 openings

NDS-1204 12" x 12" Catch Basin, 4 openings

NDS-1200BKIT 12" x 12" Catch Basin kit (includes - basin, black grate, 1-outlet, 1-plug)



CORRUGATED PIPE

4010100 4" Perforated

4510100 4" Plain (No Holes)


6010100 6" Perforated

6510100 6" Plain (No Holes)

4730100 4" w/sock

6730100 6" w/sock

DTS1020 10" Culvert Pipe



N-12 DUAL WALL PIPE

04110020IBDW Perforated drain tile

04150020IBDW Solid drain tile



12" GRATES

NDS-1211 12" Square Grate, Black

NDS-1212 12" Square Grate, Green

NDS-1212S 12" Square Grate, Sand

NDS-1213 12" Square Grate, Cast Iron

NDS-1218 12" Botanical Decorative grate, black



CORRUGATED FITTINGS

4 INCH 6 INCH

INTERNAL COUPLER

DTFC4

DTFC6

COUPLER

0412AA

0612AA

REDUCER NDS-451

0614AA

TEE

0421AA

0626AA

WYE

0422AA

0622AA

ELL

0490AA

0641AA

PLUG (UNIV)

NDS-1206

NDS-1206

OUTLET (UNIV)

NDS-1243

NDS-1266

END CAP

0432AA

0667AA

NDS-421 Pop-Up Emitter

NDS-50 6" Round Grate



18" CATCH BASINS

NDS-1884 18" One Piece Catch Basin, 4 openings

NDS-1800 18" Expandable Catch Basin, 2 openings

NDS-1804 18" Expandable Catch Basin, 4 openings



18" GRATES

NDS-1811 18" Square Grate, Black

NDS-1812 18" Square Grate, Green

NDS-1813 18" Square Grate, Cast Iron

NDS-1881 18" Atrium Grate, Black



EZFLOW FRENCH DRAIN

EZflow is an innovative gravel-free solution to a traditional french drains. It cuts installation time in half by eliminating the need to transport, shovel and move heavy gravel.

EZ-0701F 7" Mesh w/ 3" slotted pipe

EZ-1001F 10" Mesh w/ 4" slotted pipe

Additional products and options are available. Contact your local Wolf Creek Representative for more information.



OUTDOOR LIGHTING

HOLIDAY LIGHTING



Create a memorable display at your club house with LED lights. Whether you're looking for a year-round patio display in your outdoor gathering spaces or a seasonal display, Wolf Creek has what you need.

UNDERSTANDING LED

- Up to 90% energy savings
- Energy Star rating
- Bulbs are acrylic plastic and virtually unbreakable
- Extremely long bulb life
- Bulbs burn cool, so are cool to touch



WIRE AND ACCESSORIES

Everything you need for a custom installation



LED STRANDS AND BULBS

Retro-fit bulbs or strands for your rooflines, trees, and bushes



PRE-LIT GREENERY

Wreaths, garlands, and sprays for your doors, columns and windows

COMMERCIAL GRADE PATIO LIGHTING



COMMERCIAL GRADE LIGHTING WIRE

- Available in 48' and 100' lengths, bulbs are spaced every 24" to create impressive lighting displays year round
- String across pergolas, shade structures or beams
- Suspended soft edge socket design with 4" drop provide better illumination and weather-tight seal.
- Available in 12-volt or 120-volt



LED S14 CLASSIC "SIGN LAMP" SHAPE BULBS

- Long-life, energy efficient COB LED with 10% the consumption of incandescent
- 1 Watt per bulb
- Bulbs can be used in new installations or in retrofitting an old system
- Available in 12 volt or 120 volt



PRIMEPATIO

Additional products and options are available. Contact your local Wolf Creek Representative for more information.



OUTDOOR LIGHTING

LANDSCAPE LIGHTING



To pair with our Hunter Irrigation line, we also offer a full line of FX Luminaire landscape lighting. FX Luminaire is an industry-leading manufacturer of landscape and architectural lighting products. They focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities. In addition, they offer a full spectrum of highly efficient lighting fixtures that can be utilized to create elegant landscape lighting systems for a range of golf course applications, from clubhouses to pathways.

LANDSCAPE AND ARCHITECTURAL LIGHTING

FX Luminaire provides industry-leading landscape and architectural lighting solutions with a focus on the advancement of LED technology and digital lighting control with zoning, dimming, and color adjustment capabilities.

DESIGNER AND STANDARD SERIES FIXTURES

FX Luminaire offers a range of classic and contemporary lighting fixtures in all configurations, from up lights and down lights to path lights and specialty lights.

Our fixture classification system is based on material construction, performance, and price. This helps you quickly identify common fixtures and create lighting packages for any project or budget. All FX Luminaire fixtures are made with top-quality materials and backed by the industry's best support team.



LUXOR® CONTROLLER

With Luxor technology, you can liven up your clubhouse, course pathways, or property entryways to complement any occasion with 30,000 colors. Design one-of-a-kind holiday displays, create ambience for weddings, add company colors for corporate events, or simply adjust hues to match vegetation as the seasons change.

With a Luxor system, you can also create up to 250 adjustable lighting groups that can be turned on independently and dimmed from 1–100%.

The Luxor app provides ultimate flexibility and convenience when designing with Luxor lighting systems. With the app, you can adjust fixture intensities and colors, program up to 40 calendar-based themes, and fine-tune your color palette — right from the palm of your hand!

FXLuminaire

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

POND SOLUTIONS

FOUNTAINS AND POND DYE



J SERIES DECORATIVE FOUNTAINS

Kasco J Series Decorative Fountains give you the versatility, performance, and reliability you need. Ranging from 1/2HP to 7.5HP, there is a Kasco J Series Fountain perfect for any size pond or lake. Their corrosion and clog resistant technology offers reliability that is unparalleled by any other outdoor fountain brand. All J Series Fountains come with multiple nozzles that deliver elegant spray patterns.



VFX SERIES AERATING FOUNTAINS

Kasco VFX Series Aerating Fountains set the standard by which all aerating pond fountains are measured. These units deliver both superior oxygenation and aesthetic brilliance, making this a true dual-purpose fountain. As the leader in pond aeration, Kasco's VFX aerating fountains have been designed with their clog-resistant technology to ensure you are buying the most efficient unit on the market. Use the VFX Series in your pond, on the lake, in a landscaped water body, or even in industrial applications to help promote evaporation.



LED LIGHT KITS

Add optional LED lighting for beautiful night effects. Low energy cost. Choice of colored lenses.



POND DYE

Shade and protect your pond from powerful UV rays, while enhancing natural color and beauty with pond dye colorant.

- Airmax offers 4 shades: Nature's Blue, Aqua Blue, Twilight Blue, and Black DyeMond
- Available in liquids, packets, and bacteria enhanced.



Additional products and options are available. Contact your local Wolf Creek Representative for more information.

POND SOLUTIONS

UNDERWATER AERATION



FIVE REASONS TO AERATE

- 1 AERATION REDUCES POND MUCK:** Not only is muck unpleasant to see, but it can also give your pond a bad odor. Aeration combats muck and by increasing the dissolved oxygen and circulating the water, encourages the colonization of beneficial aerobic bacteria that can consume, reduce and prevent muck build-up.
- 2 AERATION IMPROVES WATER QUALITY:** Muck accumulates not only in the bottom of the pond but can also be suspended throughout the water body giving your pond a murky appearance. By reducing muck and excess nutrients, increasing oxygen, and circulating the water, you will improve your water quality and clarity.
- 3 AERATION BOOSTS DISSOLVED OXYGEN:** Without oxygen, your pond will go into an anaerobic state. Anaerobic bacteria are not as efficient at breaking down organic material as their aerobic counterparts and can produce gas, giving the pond a rotten egg smell. Incorporating aeration into the pond increases the amount of dissolved oxygen in the water, keeping your pond functioning as a healthy aerobic system.
- 4 AERATION ELIMINATES THE THERMOCLINE:** Aeration circulates and mixes water to eliminate stratified layers of warmer, surface water and the colder, deeper water, to create an oxygen rich environment throughout your pond.
- 5 AERATION PROTECTS FISH:** Harmful gas is often trapped under ice when your pond freezes or is brought up from your pond's bottom during spring and fall turnover. If enough oxygen is displaced your fish will suffocate. Aeration assists in the release of gas leaving more oxygen available for your fish.



AIRMAX SHALLOW WATER SERIES

- Aeration for ponds up to 1/2 acre, up to 10' deep
- No power is needed at the shore for these 115V systems
- SilentAir™ Linear Diaphragm Compressor reduces noise & vibration to ensure quiet operation
- ProAir™2 Weighted Diffusers incorporates high efficiency, low-maintenance membrane sticks to release tiny oxygen bubbles into the water column



AIRMAX POND SERIES

- Aeration for ponds up to 8 acres, up to 21' deep
- No power is needed at the shore for these 115V systems
- SilentAir™ Linear Diaphragm Compressor reduces noise & vibration to ensure quiet operation
- ProAir™4 Weighted Diffusers incorporates high efficiency, low-maintenance membrane sticks to release tiny oxygen bubbles into the water column

Additional products and options are available. Contact your local Wolf Creek Representative for more information.

SNOW AND ICE REMOVAL

SNOW AND ICE REMOVAL ACCESSORIES



ICE PATROL

- Economical and effective ice melt
- Optimally sized granules for maximum performance
- Ice melt flows freely through commercial spreaders
- Variety of packaging types and sizes available



POLAR ICE MELT

- Safe to handle without protective clothing and doesn't dry out or irritate skin
- Starts melting quickly upon application
- Excellent staying power
- Highly visible blue indicator
- Less harmful to grass, shrubs and concrete



PROSLICER

- Quickly melts ice and snow down to -20°
- Pre-wet deicer means less material and fewer applications
- Vivid purple color is easy to see and won't track or stain
- Safer on skin, sidewalks, leather, metal, plants, and pets when used as directed



SNOW PUSHER

- Strong steel shaft clears even the heaviest load
- Blade features a reinforced full width leading edge
- Tough, high-impact polypropylene for years of dependable service
- 24" blade

80052



BROADCAST SPREADER

- Ergonomically designed handle that adjust from 5'5" to 6'3"
- Impact-resistant, bridge-free hopper allows material to flow freely
- Spyker Dial is industry's most accurate calibration
- AccuWay™ technology ensures an even, balanced spread pattern

SPY801P



SNOWCASTER

- Reduce fatigue, easy on your back - no lifting
- 50% more efficient than traditional snow shovels
- Bi-directional blade
- Proven commercial application
- Assembles in less than 10 minutes

30SNC



DRIVEWAY MARKERS

- Highly visible, colorful and eye-catching
- 48" reflective rod

2162601

Additional products and options are available. Contact your local Wolf Creek Representative for more information.



DIRECT-TO-COURSE DELIVERY IS OUR SPECIALTY

Count on us to get you what you need, when you need it.
Scheduled delivery service throughout Ohio, Kentucky and Pennsylvania..
Prompt, professional and accurate.
Call now to place your order.

GOLF LOCATIONS

CINCINNATI

11956 Tramway Drive
Cincinnati, Ohio 45241
(513) 489-8455

CLEVELAND

26245B Broadway Avenue
Bedford, Ohio 44146
(440) 735-1702

COLUMBUS

6700B Huntley Road
Columbus, Ohio 43229
(614) 985-3070

DAYTON

1800 Alex Road
West Carrollton, OH 45449
(937) 247-0355

HQ - TROTWOOD

6051 Wolf Creek Pike
Dayton, OH 45426
(937) 529-2155

LEXINGTON

839 Contract Street
Lexington, KY 40505
(859) 225-1223

LOUISVILLE

13030 Middletown
Industrial Blvd
Louisville, KY 40223
(502) 244-7373

PITTSBURGH

11-A Robinson Manor Blvd Ext
McKees Rocks, PA 15136
(412) 788-9177



WOLF CREEK CO.
DISTRIBUTION

833-922-GOLF

golf@wolfcreekcompany.com

WolfCreekCompany.com